



NEW

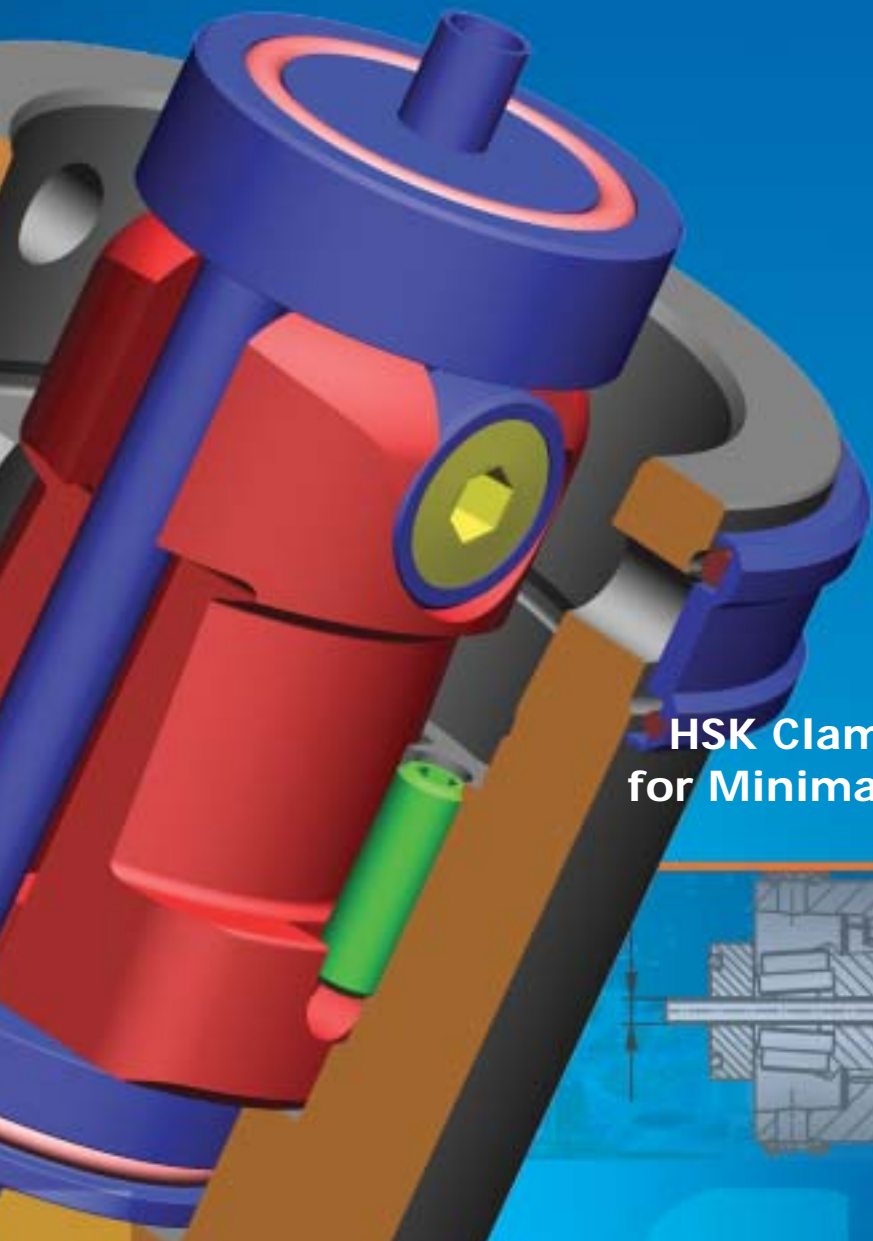

HSK Clamping System for Minimal Lubrication

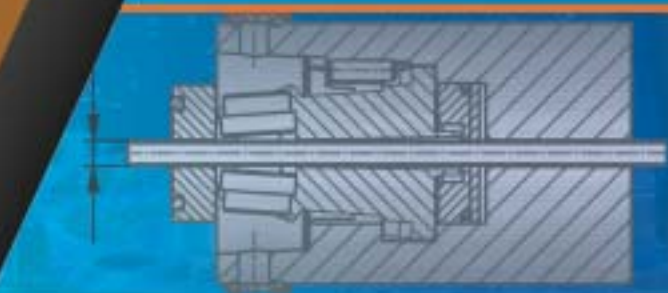

KomLoc[®]




HSK Clamping System for Minimal Lubrication

KomLoc® clamping system now optimised for minimal lubrication


Description/Features

- KomLoc® minimal lubrication clamping cartridge with free centre
- through coolant hose for minimal lubrication supply
- high clamping forces similar to KomLoc® system
- integral ejector
- compatible with existing KomLoc® contour
- available in sizes HSK 40, 50, 63, 80 and 100
- control key can be applied on both sides

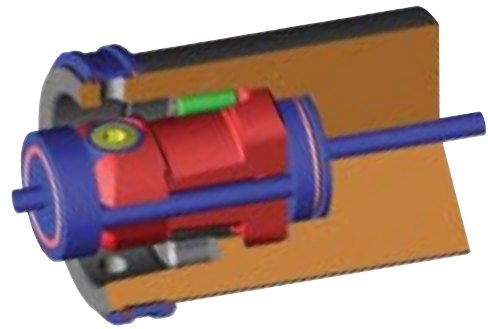

KomLoc® clamping cartridge for minimal lubrication


HSK size	Order No. with ejector	d	Clamping force in kN
40	L07 02040	3,9	20
50	L07 02050	4,9	30
63	L07 02060	6,9	40
80	L07 02070	7,9	50
100	L07 02080	9,9	70

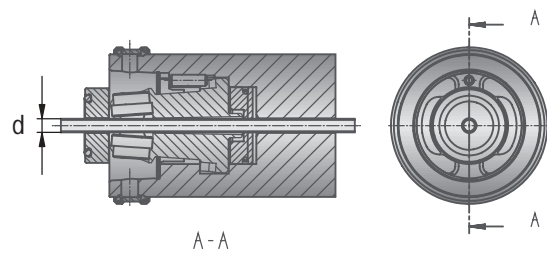

Patents applied for.

The appropriate MMS clamping cartridge is also available for spindle contours which are already on the market.

Use of minimal lubrication on a special tool

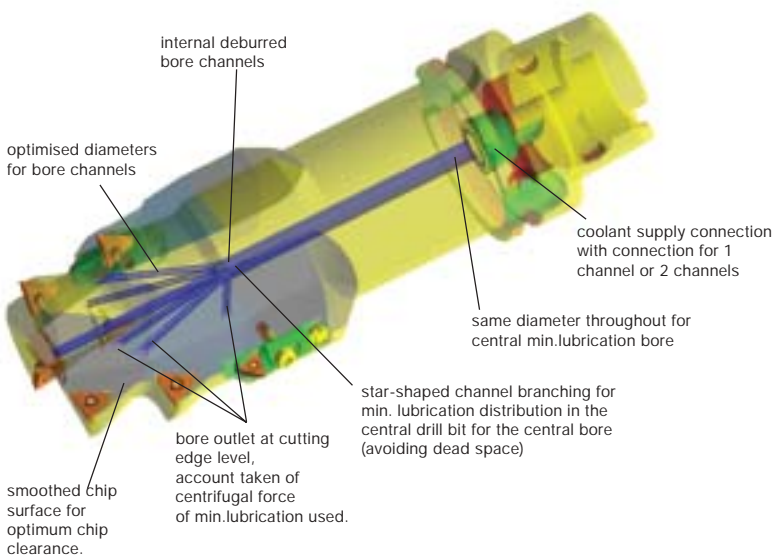

Special tool with KUB Duon® replaceable insert

